



- DIN 2253
- Hardened tool steel
- Delivered in individual packages


1158 1.. :
Up to Ø100mm fully cylindrical gauge discs on request
1158 2.. :
Over Ø100mm flat with cylindrical measuring faces on request

Check gauges for limit snap gauges



- Conform to ISO 7606-1982.
 - A Type – Pin button anvils
 - C Type – Square type anvils
 - U Type – Groove type anvils
- U type gauges available on request
- Hardened and ground anvils
- Stressed relieved cast iron frame
- Easy to set
- Durable and robust
- Parallelism: 3µm up to 38mm
4µm up to 89mm
5µm up to 300mm
- Flatness of anvils 1.5µm

Adjustable Snap Gauges

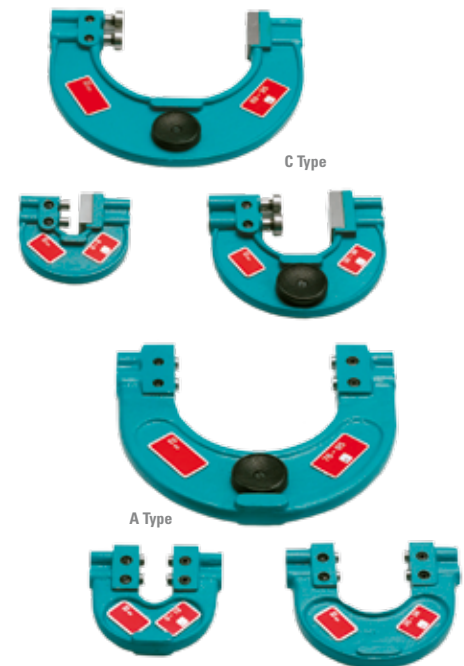

Snap Gauge A Type	
Range (mm)	Part No.
0 - 13	11-01-013A
13 - 25	11-01-025A
25 - 38	11-01-038A
38 - 51	11-01-051A
51 - 64	11-01-064A
64 - 76	11-01-076A
76 - 95	11-01-095A
95 - 114	11-01-114A
114 - 133	11-01-133A
133 - 152	11-01-152A
152 - 178	11-01-178A
178 - 203	11-01-203A
203 - 229	11-01-229A
229 - 254	11-01-254A
254 - 279	11-01-279A
279 - 305	11-01-305A

Snap Gauge C Type	
Range (mm)	Part No.
0 - 6	11-01-006C
6 - 13	11-01-013C
13 - 19	11-01-019C
19 - 25	11-01-025C
25 - 32	11-01-032C
32 - 38	11-01-038C
38 - 44	11-01-044C
44 - 51	11-01-051C
51 - 57	11-01-057C
57 - 63	11-01-063C
63 - 70	11-01-070C
70 - 76	11-01-076C
76 - 82	11-01-082C
82 - 89	11-01-089C
89 - 95	11-01-095C
95 - 101	11-01-101C
101 - 108	11-01-108C
108 - 114	11-01-114C

Snap Gauge C Type	
Range (mm)	Part No.
114 - 120	11-01-120C
120 - 127	11-01-127C
127 - 133	11-01-133C
133 - 139	11-01-139C
139 - 146	11-01-146C
146 - 152	11-01-152C
152 - 163	11-01-163C
163 - 175	11-01-175C
175 - 188	11-01-188C
188 - 200	11-01-200C
200 - 213	11-01-213C
213 - 225	11-01-225C
225 - 238	11-01-238C
238 - 250	11-01-250C
250 - 263	11-01-263C
263 - 275	11-01-275C
275 - 288	11-01-288C
288 - 300	11-01-300C

- Works standard
- Tungsten carbide-tipped measuring faces
Ø 10mm
- Metal frame with heat-insulated handle
- Centre supports and lifting device
- Free lift 2.5mm
- Adjustable tolerance marks
- Splash-water protected
- Delivered in a case

1160 1.. :
Reading 1µm, Indicating range ±70µm
1160 2.. :
Reading 2µm, Indicating range ±150µm

Range mm	Weight kg	Part No.	Part No.
0-25	0,8	1160 101	1160 201
25-50	1,0	1160 102	1160 202
50-75	1,2	1160 103	1160 203

Range mm	Weight kg	Part No.	Part No.
75-100	1,3	1160 104	1160 204
100-125	1,6	-	1160 205
125-150	1,7	-	1160 206

Comparator snap gauges, adjustable with indicator

